



CTRTA(-D)

CO₂ and temperature transmitters

A range of room transmitters for measuring carbon dioxide concentration in indoor environments. The transmitter has a built-in CO₂ sensor with working range 0...2000 ppm and output signal 0...10 V, as well as built-in 0...10 V and PT1000 temperature sensors (working range 0...50°C).

- ✓ Output signal CO₂, 0...10 V DC referring to 0...2000 ppm
- ✓ Temperature sensors 0...10 V DC referring to 0...50°C and PT1000 class DIN B
- ✓ CO₂ concentration, 0...2000 ppm
- ✓ Temperature 0...50°C
- ✓ Good long-term stability
- ✓ RCBC algorithm

Function

Transmitters with automatic calibration combining measurement of CO₂ level and temperature in the same casing. The sensors are mounted in the cover-part of the casing. The cover is easy to detach from the back by means of snap-in grips and detachable terminals. This makes mounting easier. Furthermore, no cables have to be disconnected, simplifying service and replacement. The transmitters are intended for wall mounting in HVAC systems.

CO₂ sensor

The CO₂ concentration is measured using infrared light, a technique that measures the absorption in gases. It has a reference measuring system that compensates values in relation to changes in light intensity. This technique has many advantages:

- Very high accuracy
- Exact identification of the detected gas
- Low risk of contamination
- Short response time
- Excellent long-term stability

Automatic calibration

The transmitters have automatic calibration, which means that manual recalibration is not required during the lifetime of the transmitter.

Temperature sensor

The unit has built-in 0...10 V and PT1000 temperature sensors, working range 0...50°C.

Note! The PT1000 sensor is not compensated for internal warm-up. The passive temperature output must be calibrated with a controller.

RCBC algorithm

The transmitter is equipped with a function that can be activated to get a more stable CO₂ level in a room that is not used for parts of a day.

Display (-D models)

Display models have an LCD display showing carbon dioxide concentration and temperature in an alternating series.

Applications

The carbon dioxide level gives a direct indication of the indoor air quality. This information can be used to control ventilation with high precision and improve the air quality. By increasing the supply air only when necessary, it is possible to minimise energy costs.

The transmitter is especially suited for environments such as cinemas, schools, hospitals, conference rooms, assembly halls, etc.

Technical data

Supply voltage	24 V AC/DC (21.6...26.4 V AC / 15...35 V DC)
Power consumption	< 2.5 W
Energy consumption	< 0.5 Wh
Transformer power	5 VA
Electrical connection	Screw terminals max. 1.5 mm ² (AWG 16)
Ambient temperature	0...50°C
Ambient humidity	10...90 % RH non-condensing
Storage temperature	-25...+60°C
Protection class	IP30
Dimensions (WxHxD)	85 x 100 x 30.5 mm
Colour	Signal white RAL 9003

Technical data, CO₂ sensor

Output signal CO₂	0...10 V DC referring to 0...2000 ppm
Working range	0...2000 ppm
Accuracy at 20°C	< ± (50 ppm + 2 % of the measured value)
Temperature dependance	Typically 5 ppm / K
Long-term stability	Typically 20 ppm / year
Time constant	< 90 s
Warmup time	< 5 min

Technical data, temperature sensor 0...10 V

Temperature sensor	0...10 V DC referring to 0...50°C
Working range	0...50°C
Accuracy	±0.4°C

Technical data, temperature sensor PT1000

Temperature sensor	PT1000 class DIN B
Working range	0...50°C
Accuracy	±0.3°C


Models

Article	Description
CTRTA	CO ₂ and temperature transmitter
CTRTA-D	CO ₂ and temperature transmitter with display


CE

This product carries the CE mark. More information is available at www.regincontrols.com.

Dimensions

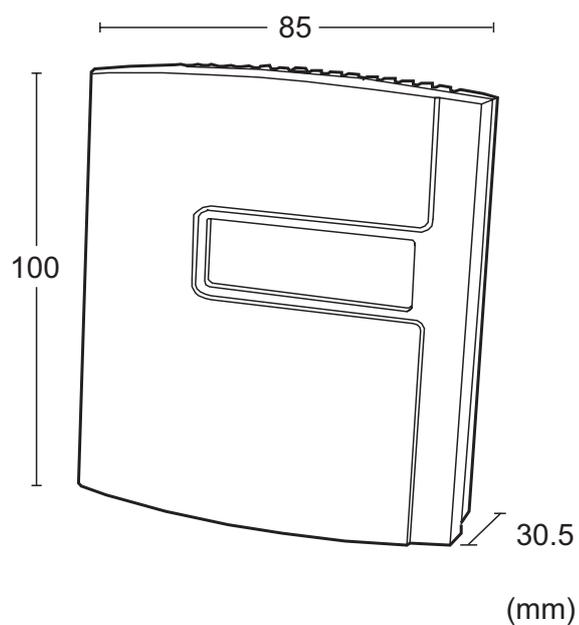

Wiring

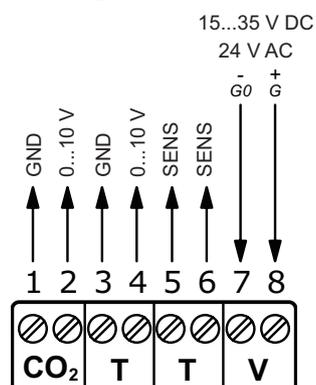

Product documentation

All documentation can be downloaded from www.regincontrols.com.